


R4815N1 Rectifier



Rectifier

Features

- ✓ High efficiency: $\geq 94\%$
- ✓ Input voltage range: 85~300VAC
- ✓ Operating temperature range: $-40\sim+75^{\circ}\text{C}$
- ✓ Total harmonic distortion(THD): $\leq 5\%$
- ✓ Hot-plug
- ✓ Digital control
- ✓ Intelligent electric meter
- ✓ Communication over CAN
- ✓ Adjustment of voltage and current
- ✓ Meet RoHS requirements
- ✓ Passing the TUV,CE,CB,UL certifications

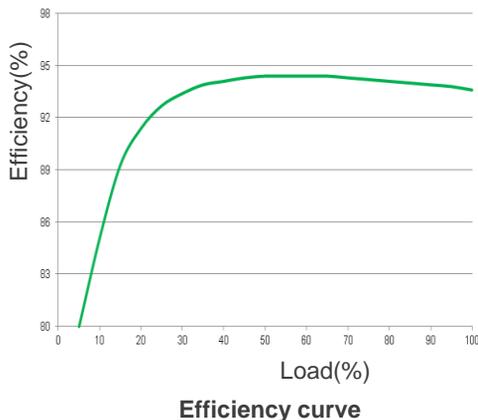


Introduction


The R4815N1 is a digital rectifier that converts the 85~300VAC input to 53.5 VDC output and possesses the characters of high efficiency, walk-in start, hot-plug, complete protection, and low audible noise. The rectifier adopts the latest power monitoring technology, implements the function of monitoring the states of loads and the rectifier status in real time. The output voltage of the rectifier can be adjusted through the host.

Electrical Specifications	Specification
Input	
Input voltage	85~300VAC
Input voltage mode	220VAC single phase (or 110VAC dual live lines)
Frequency	45~65Hz Rated: 50Hz/60Hz
Maximum input current	$\leq 6.4\text{A}$
Power factor	≥ 0.99
THD	$\leq 5\%$
Output	
Output voltage	42~58VDC Default value: 53.5VDC
Output power	1000W(176~300VAC)
Others	
Dimension	40.8(H)mm×95.5(W)mm×208(D)mm
Weight	$\leq 1.1\text{kg}$
Cooling	Forced air cooling
Environmental Specifications	
Operating temperature	$-40^{\circ}\text{C}\sim+75^{\circ}\text{C}$
Storage temperature	$-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$
Relative humidity	5%~95%(non-condensing)
Altitude range	$\leq 4000\text{m}$ (If the altitude is within the range of 3000m to 4000m, the maximum operating temperature decreases by 1°C as the altitude increases by 200m.)


R4815N1 Rectifier

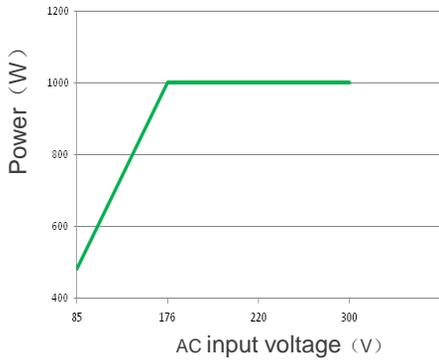

AC input-Power Derating Curve

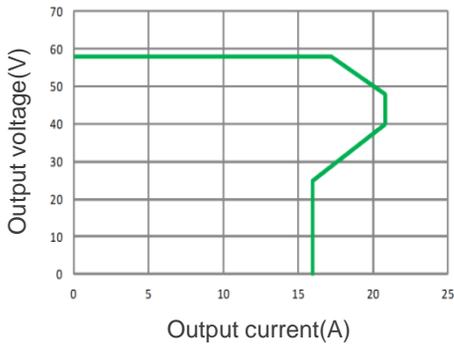

Output voltage V.S Output current

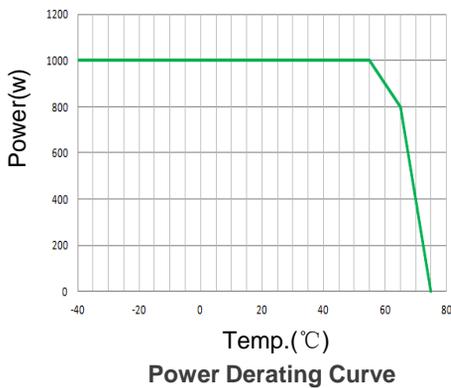

Power Derating Curve

Protection	
Input overvoltage protection	Protection point: >300VAC
Input undervoltage protection	Protection point: <80VAC
Output overvoltage protection	58.5~60.5VDC(can be set by PMU)
Output short circuit protection	A long term short circuit is allowed
Over-temperature protection	Protection point: $\geq 75^{\circ}\text{C}$ (167°F)
Reliability	
MTBF	>500,000hours
Audible Noise	
Specification	$\leq 40\text{db}(25^{\circ}\text{C}, 100\% \text{ load})$
Safety/EMC/Lightening Protection	
Safety Certification	Passes TUV, CE, UL certifications Catch the CB certificate Complies with UL60950-1, IEC60950-1, EN60950-1, CAN/CSA C22.2 No. 60950 -1
EMC	EN55022 Class B EN55024 EN61000-3-2 EN61000-3-3 ETSI EN300 386 ETSI EN301489 ITU-T K.20
Lightning protection	YD 5098-2005 5KA

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129, P.R.China
Tel: +86-755-28780808
www.huawei.com

